



XL Plastics

Converting Machinery

DELTA Series Servo Driven

DELTA Series Servo Driven

- High Speed up to 75 Bags/min.
- Servo Motor for Indexing & Accuracy
- Microprocessor Controlled with Digital Display
- Keypad Setting for Speed, Size & Count
- Backlit Display for operating parameters
- Pre - Sealer for extra seal strength on Bottom gusset
- Fitting of Patch by Heat Sealing
- Pneumatic Die cut Handle Attachment

Automatic Patch Handle Bag Making Machine




75
bags/min.


Suitable for
LDPE, HDPE Film

Model:
PH 800 DELTA

Types of Bags Possible :



Patch Handle Bag




Die Cut Handle Bag

Features :

DELTA Series Servo Driven

- High Speed up to 75 Bags/min.
- Servo Motor for Indexing & Accuracy
- Microprocessor Controlled with Digital Display
- Keypad Setting for Speed, Size & Count
- Backlit Display for operating parameters
- Pre - Sealer for extra seal strength on Bottom gusset
- Fitting of Patch by Heat Sealing
- Pneumatic Die cut Handle Attachment

Complete Processing Steps For Patch Handle Plastic Bag Manufacturing:

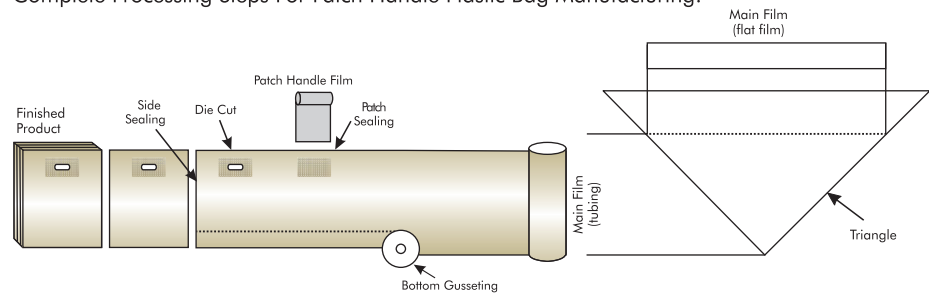

Specifications

| Model | Handle Type | Bag Width mm | Bag Length mm | Bottom Gusset Max. mm | Thickness Microns | Max. Speed Bags/min | Connected Load KW | Weight Kg | Comp. Air cfm | Dimensions W x L x H cm |
|--------------|-------------|--------------|---------------|-----------------------|-------------------|---------------------|-------------------|-----------|---------------|-------------------------|
| PH 800 Delta | Patch | 250 - 500 | 250 - 700 | 75 | 40 - 90 | 75 | 14 | 2800 | 20 - 25 | 255 x 828 x 202 |
| | Die Cut | 250 - 500 | 250 - 700 | 75 | 40 - 90 | 120 | | | | |

Standard Supply Voltage: 415 V, 3 Phase & Neutral, 50 Hz
(Can be changed as per customers requirement)

Patch Handle Film Specs. :

- Width = 150mm
- Thickness = 100 Micron

The manufacturer reserves the right to change design/specifications because of continuous developments.

Accessories/Attachments shown on the photograph may not be part of the standard machine.

Max. Speed shown above is only indicative and the actual speed will depend on size, thickness and the materials of the film.

Compressed Air & Chilled Water, If Required, Not in our Scope of Supply.



XL Plastics

303/2 Makarpura Ind. Estate, Vadodara 390 010, INDIA

Tel : + 91-265-2638125, 2638026 • Fax : + 91-265-2638661

E-mail : info@xlplastics.com

Website : www.xlplastics.com