



## **DELTA Series Servo Driven**

- High Speed Up To 80 Bags/Min.
- Two Servo Motors For Indexing And For Maintaining Tension
- Microprocessor Controlled With Digital Display
- Keypad Setting For Speed, Size & Count
- Backlit Display For Operating Parameters
- Pre Sealer For Extra Seal Strength On Gusset & Top Fold
- Edge Guiding System On Unwind
- Pneumatic Die Cut Handle Attachment On Patch Side
- Reciprocating Double Lip Sealer on Loop Side



## **Types of Bags Possible:**






Soft Loop Handle Bag

Soft Loop with Double Lip Sealing & Pre-Sealer



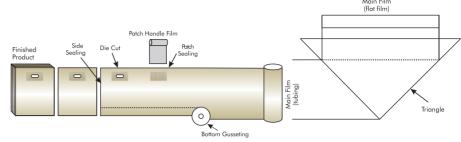








Draw String (Optional Attachment)

COMPLETE PROCESSING STEPS FOR SOFT LOOP HANDLE PLASTIC BAG MANUFACTURING:

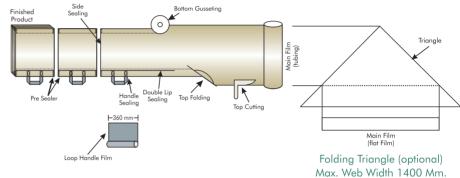

## **Specifications**

| Model          | Handle    | Bag Width | Bag Length | Top Fold | Bottom Gusset | Thickness | Max. Speed | Connected | Weight | Comp. Air | Dimensions      |
|----------------|-----------|-----------|------------|----------|---------------|-----------|------------|-----------|--------|-----------|-----------------|
|                | Туре      | mm        | mm         | mm       | Max. mm       | Microns   | Bags/min   | Load KW   | Kg     | cfm       | W x L x H cm    |
| SLPH 800 Delta | Soft Loop | 280 - 500 | 250 - 600  | 70 - 75  | 75            | 50 - 90   | 80         | 14        | 3300   | 25 - 30   | 255 x 828 x 202 |
|                | Patch     | 250 - 500 | 250 - 600  | _        | 75            | 40 - 90   | 75         |           |        |           |                 |
|                | Die Cut   | 250 - 500 | 250 - 600  | _        | 75            | 40 - 90   | 120        |           |        |           |                 |

Standard Supply Voltage: 415 V, 3 Phase & Neutral, 50 Hz (Can be changed as per customers requirement)

Loop Handle Film Specs. :

- Size = 360mm width Thickness = 140-160 Micron
- Pre-Slited Tubular Rolls, Corona Treated on Non Sealing Side

Patch Handle Film Specs:

• Width = 150 mm • Thickness = 100 Micron

The manufacturer reserves the right to change design/specifications because of continuous developments.

Accessories/Attachments shown on the photograph may not be part of the standard machine.

Max. Speed shown above is only indicative and the actual speed will depend on size, thickness and the materials of the film. Compressed Air & Chilled Water, If Required, Not in our Scope of Supply.



Œ



## **XL Plastics**

303/2 Makarpura Ind. Estate, Vadodara 390 010, INDIA

Tel: + 91-265-2638125, 2638026 • Fax: + 91-265-2638661

E-mail: info@xlplastics.com Website: www.xlplastics.com