



**XL Plastics**


Converting Machinery

DELTA Series Servo Driven

### DELTA Series Servo Driven

- High Speed up to 80 Bags/min.
- Two Servo Motors for Indexing and for maintaining tension
- Microprocessor Controlled with Digital Display
- Keypad Setting for Speed, Size & Count
- Backlit Display for operating parameters
- Pre - Sealer for extra seal strength on gusset & top fold
- Auto conveyor for Finished Bags.
- Reciprocating Double Lip Sealer for Top Fold
- Edge Guiding System on Unwind

## Automatic Soft Loop Handle Bag Making Machine

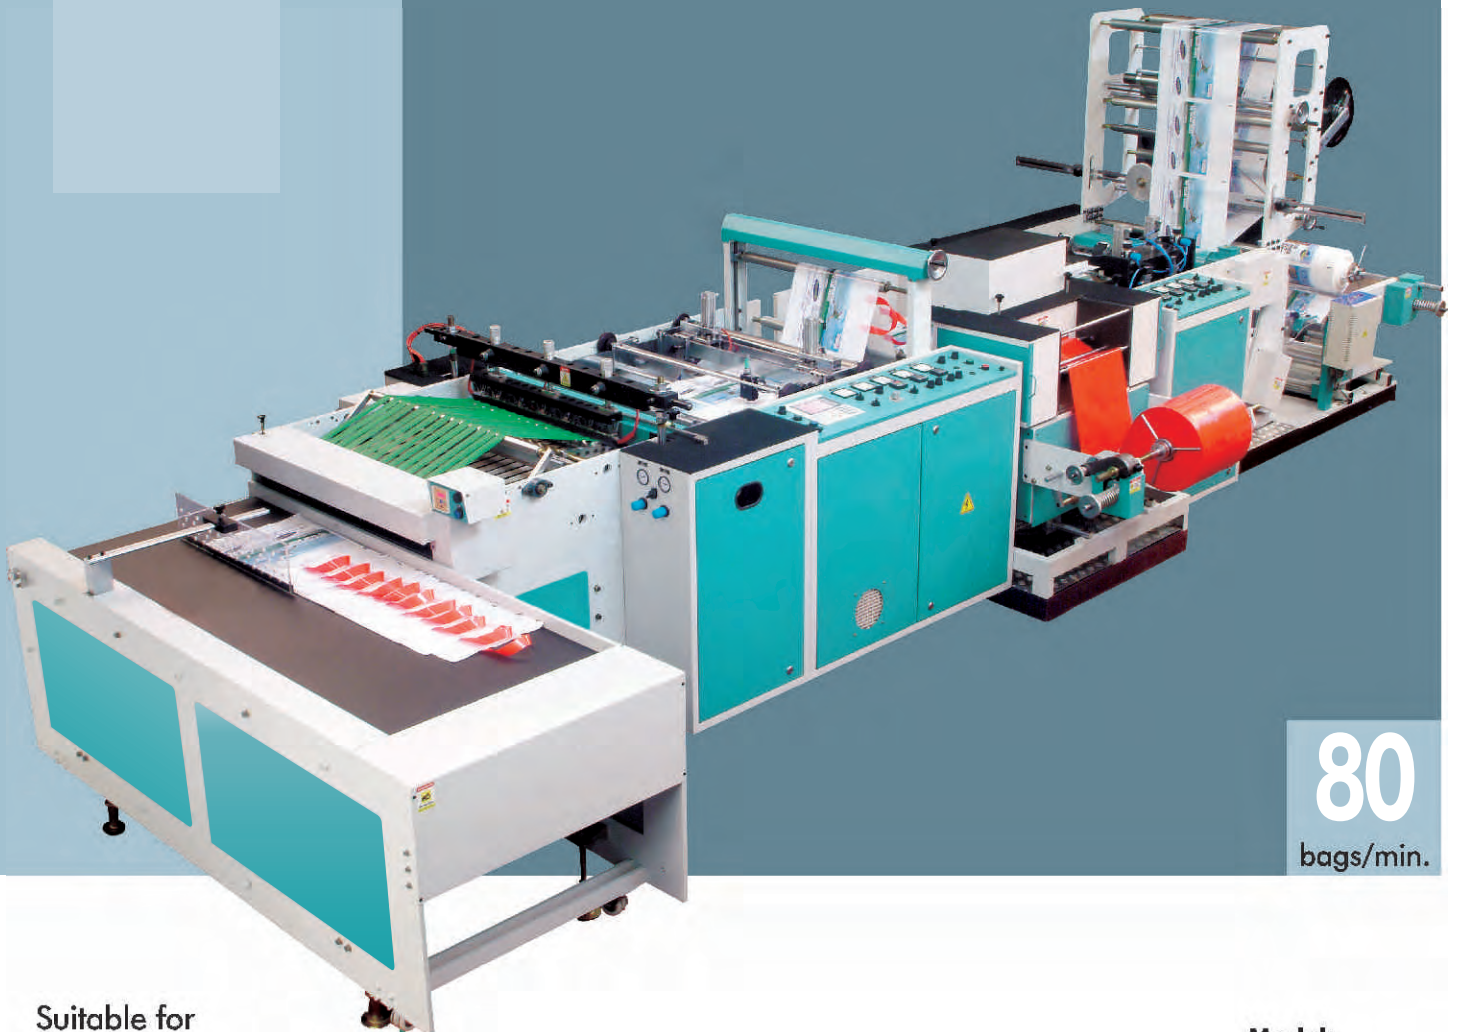


**80**  
bags/min.


Suitable for  
LDPE & HDPE Film

Model:  
SLH 800 DELTA

## Types of Bags Possible :



Side Seal-Soft Loop




Soft Loop with Double Lip Sealing & Pre-Sealer

## Features :

### DELTA Series Servo Driven

- High Speed up to 80 Bags/min.
- Two Servo Motors for Indexing and for maintaining tension
- Microprocessor Controlled with Digital Display
- Keypad Setting for Speed, Size & Count
- Backlit Display for operating parameters
- Pre - Sealer for extra seal strength on gusset & top fold
- Auto conveyor for Finished Bags.
- Reciprocating Double Lip Sealer for Top Fold
- Edge Guiding System on Unwind

### Complete Processing Steps For Soft Loop Handle Plastic Bag Manufacturing:

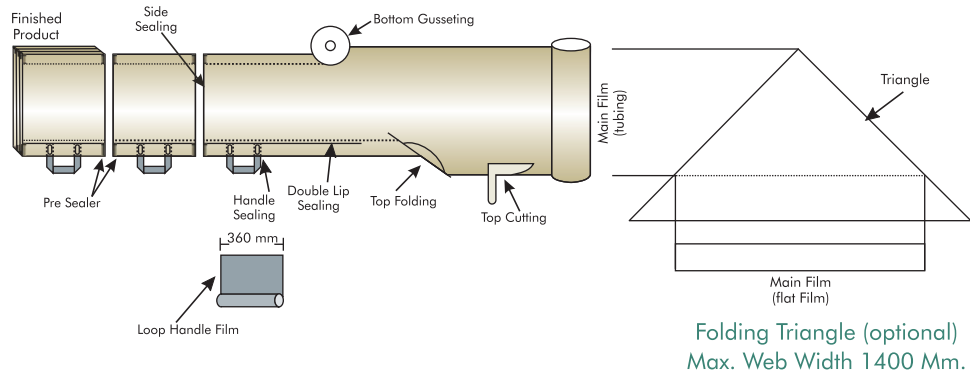

## Specifications

Model	Bag width mm	Bag length mm	Top Fold mm	Bottom Gusset Max. mm	Thickness Micron	Max. Speed Bags/min.	Connected Load KW	Weight Kg.	Comp. Air cfm	Dimensions W x L x H cm
SLH Delta 800	280 - 500	250 - 600	70 - 75	75	50 - 90	80	12	3000	25 - 30	267x 805x 202

Standard Supply Voltage: 415 V, 3 Phase & Neutral, 50 Hz  
(Can be changed as per customers requirement)

### Loop Handle Film Specs. :

- Size = 360mm width
- Thickness = 140-160 Micron
- Pre-Slited Tubular Rolls, Corona Treated on Non Sealing Side

The manufacturer reserves the right to change design/specifications because of continuous developments.

Accessories/Attachments shown on the photograph may not be part of the standard machine.

Max. Speed shown above is only indicative and the actual speed will depend on size, thickness and the materials of the film.

Compressed Air & Chilled Water, If Required, Not in our Scope of Supply.



## XL Plastics

303/2 Makarpura Ind. Estate, Vadodara 390 010, INDIA

Tel : + 91-265-2638125, 2638026 • Fax : + 91-265-2638661

E-mail : info@xlplastics.com

Website : www.xlplastics.com