



XL Plastics

Converting Machinery

DELTA Series Servo Driven

DELTA Series Servo Driven

- High Speed up to 250 strokes/min.
- Servo Motor for Indexing and Accuracy
- Microprocessor Controlled with Digital Display
- Keypad Setting for Speed, Size & Count
- Backlit Display for Operating Parameters
- Photocell Control to Convert Printed Rolls

Side Seal

Bag Making Machine




250
strokes/min.


SS 800 DELTA With Auto Stacker
(Optional)

Suitable for
LDPE, HDPE
PP & BOPP Film

Types of Bags Possible :

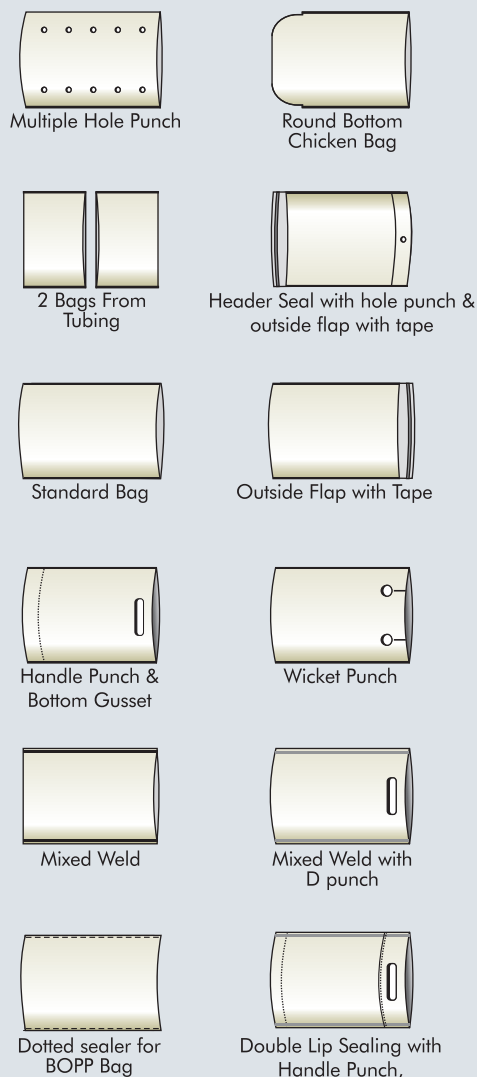

Complete Processing Steps For Side Seal Bag Manufacturing

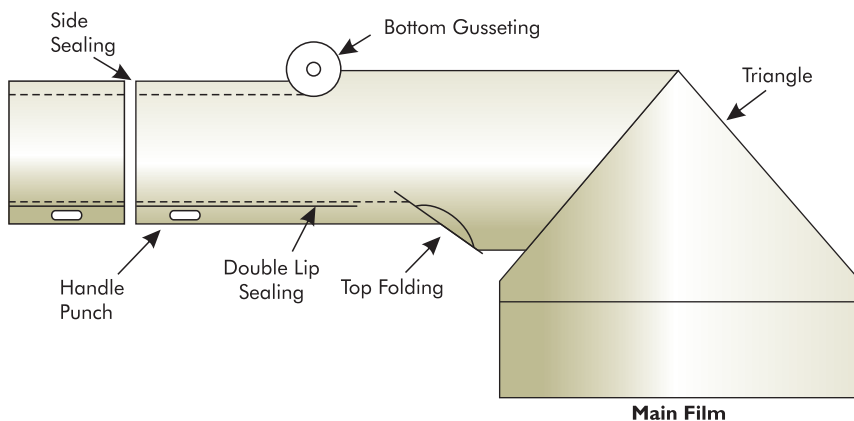

Optional Attachments :

- Sheet Folding Device
- Web Aligner (EPC)
- Auto Stacker
- Handle Punch
- Hole Punch
- Rotary Perforator
- Lip Former
- Bottom Gusseter
- Adhesive Tape Applicator
- Mixed Weld Seal
- Multiple Hole Punch Bank
- Chicken Bag
- Header Sealer
- Wicket Punch
- Double Lip Sealer

Specifications

Model	Max.Web	Draw Length mm		Max. Speed	Connected	Approx.	Dimensions
	Width mm	Min.	Max.	strokes/min	Load KW	Weight Kg	W x L x H cm
SS 600 DELTA	610	75	600	250	7.5	1550	145 x 438 x 202
SS 800 DELTA	810	75	600	250	8.0	1800	165 x 438 x 202
SS 1000 DELTA	980	75	650	180	9.5	2000	190 x 438 x 202

Standard Supply Voltage: 415 V, 3 Phase & Neutral, 50 Hz
(Can be changed as per customers requirement)

Comp. Air Requirement : 10 Cfm

The manufacturer reserves the right to change design/specifications because of continuous developments.

Accessories/Attachments shown on the photograph may not be part of the standard machine.

Max. Speed shown above is only indicative and the actual speed will depend on size, thickness and the materials of the film.

Compressed Air & Chilled Water, If Required, Not in our Scope of Supply.



XL Plastics

303/2 Makarpura Ind. Estate, Vadodara 390 010, INDIA

Tel : + 91-265-2638125, 2638026 • Fax : + 91-265-2638661

E-mail : info@xlplastics.com

Website : www.xlplastics.com